
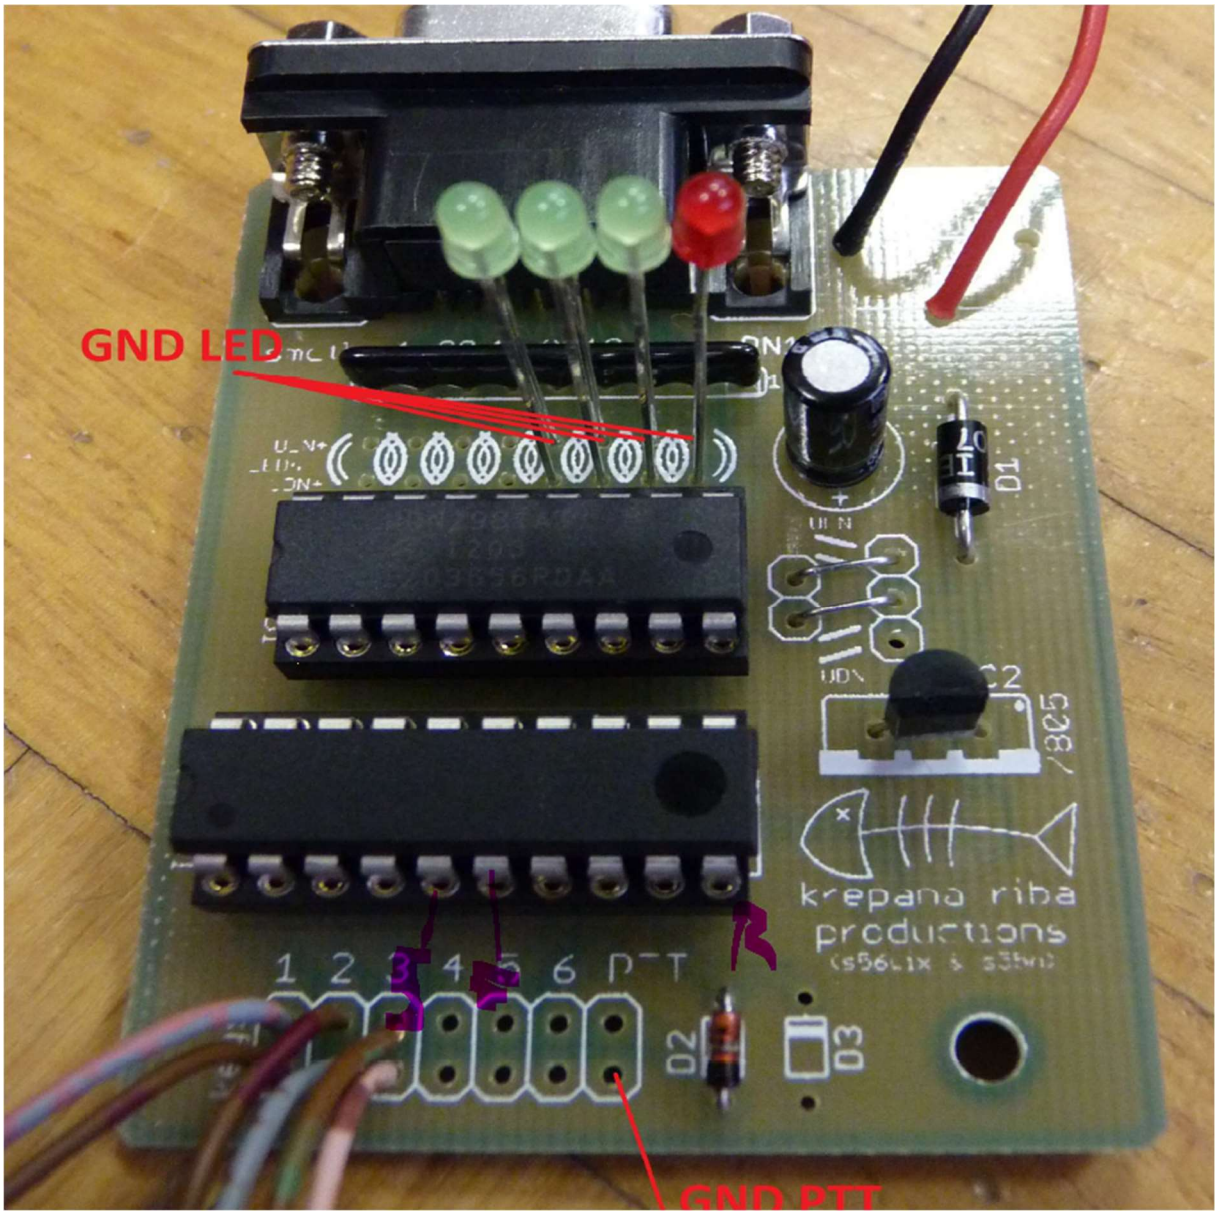


There are two possible ways to configure PTT circuit for hot switching protection:

1. With a Diode 1N4148 on position D2, the D3 remains empty


2. With the appropriate resistor values (e.g. 10k) at D2 and 4V7 Zener diode on the position D3. 1N4148

*Chose the best solution for your station PTT switching requirements.

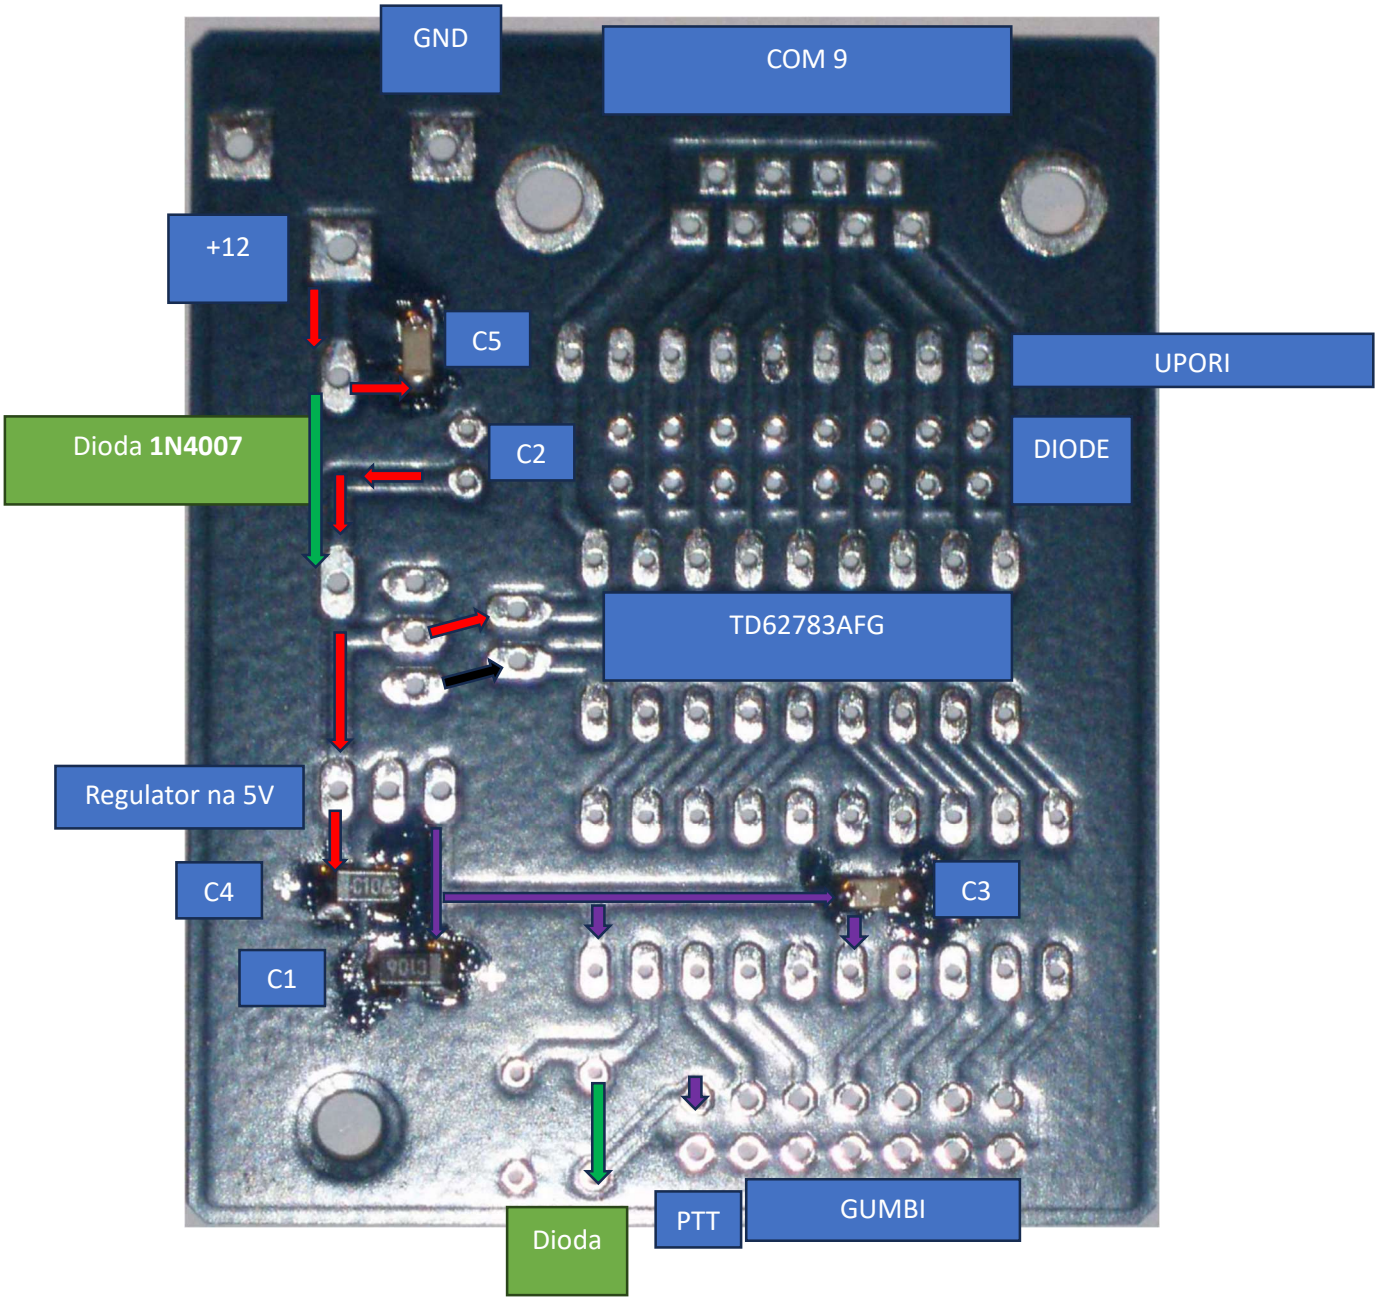

Rdeča barva 12V

Lila barva 5V

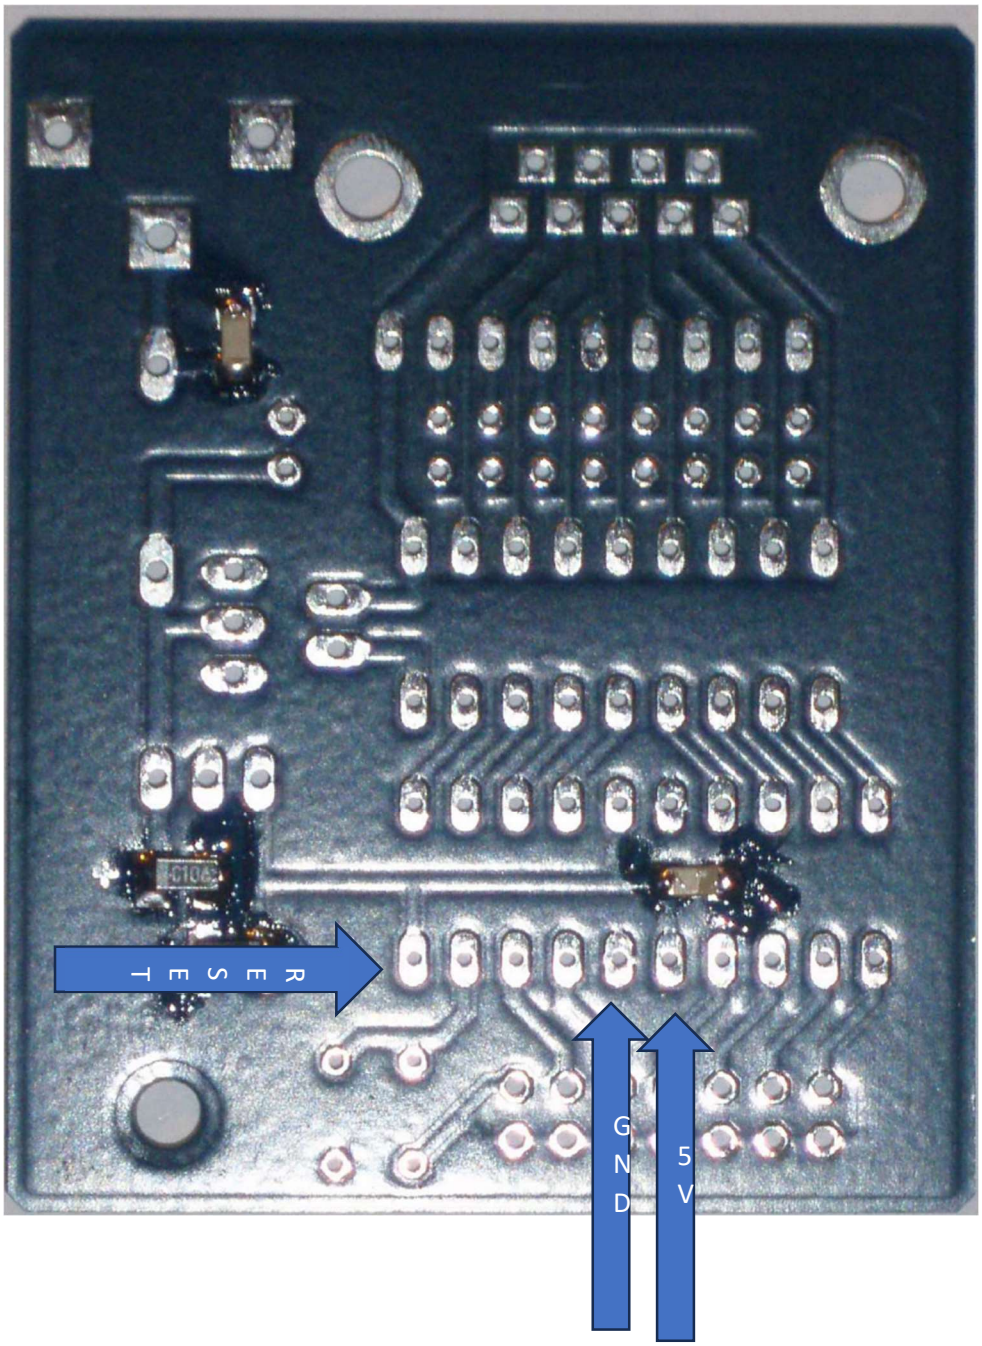
RESET
GND
5V